

SiLiglit Polyester Glitter Grade II

Product Data Sheet

Version: V13/2017

First created on: 2011-07-12
Next inspection on: 2018-06-30Updated on: 2017-07-13
Printed on: 2017-07-13

Manufacturer / Supplier:

Sigmund Lindner GmbH
Oberwarmensteinacher Strasse 38
95485 Warmensteinach
Germany
Phone: +49-9277-9940
Fax: +49-9277-99499
Web: www.sili.eu
E-Mail: sili@sigmund-lindner.com

Company Sigmund Lindner GmbH has established a Quality Management System according DIN EN ISO 9001 since 1997.

Responsible:

Erwin Pschierer, Product Manager Glitter
Phone: +49-9277-99483
Fax: +49-9277-99489
E-Mail: Erwin.Pschierer@sigmund-lindner.com

Trade name:


Polyester Glitter Grade II

Application of product: Effect material for decoration and other products

Construction of the Article number:

Material	Size		Colour	Form
27	01	—	51A-11	hex

Construction of Glitter particle:

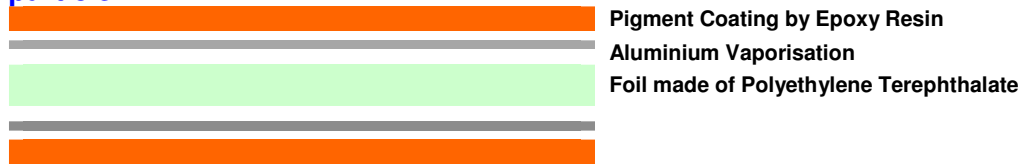

Chemical composition:

Name	Weight	CAS-No.	EG-No. (EINECS)	CI-No.	FDA/CFR
Epoxy Resin *) high polymeric structure	5,3 %	---	---	none	
Solvent	1,4 %				
Solvent Yellow 21	depends on Article between 0-1,4 %	5601-29-6	227-022-5	none	---
Solvent Red 122		12227-55-3	none	none	---
Solvent Red 127		61969-48-0	none	none	---
Solvent Blue 70		12237-24-0	none	74400	---
Solvent Black 27		12237-22-8	none	none	---
Aluminium	0,4 %	7429-90-5	231-072-3	77000	
Polyethylene Terephthalate	92,9 %	25038-59-9	none	---	FDA Ref# 21 CFR 177.1630

*) which are hardened after the production process, middle molecular weight > 700

Available Sizes:

Size particle		Gauge / thickness 0,050mm / 0.0020"	Form
2,50 mm	0.100"	Art. 275025	stars
3,00 mm	0.125"	Art. 275030	stars
3,00 mm	0.125"	Art. 274030	hearts
3,00 mm	0.125"	Art. 277030	crests

SiLiglit Polyester Glitter Grade II

Product Data Sheet

Version: V13/2017



First created on: 2011-07-12
Next inspection on: 2018-06-30

Updated on: 2017-07-13
Printed on: 2017-07-13

Available Sizes:

Size particle		Gauge / thickness 0,050mm / 0.0020"	Form ● hex
0,10 mm	0.004" hex	Art. 27201	X
0,20 mm	0.008" hex	Art. 2710	X
0,30 mm	0.012" hex	Art. 27015	X
0,40 mm	0.015" hex	Art. 2701	X
0,60 mm	0.025" hex	Art. 2702	X
0,80 mm	0.032" hex	Art. 2703	X
1,00 mm	0.040" hex	Art. 2704	X
1,30 mm	0.052" hex	Art. 2706	X
1,60 mm	0.062" hex	Art. 2708	X
2,00 mm	0.080" hex	Art. 27085	X
2,50 mm	0.094" hex	Art. 2709	X
3,00 mm	0.125" hex	Art. 27095	X

Tolerance size particle/gauge: +/- 10 %

Colours / Solvents:

Colours	Colourants	
03A-11 Hologram magenta	Solvent Red 122	Solvent Red 127
37A-11 Hologram lilac	Solvent Red 127	Solvent Blue 70
47A-11 Hologram lavender	Solvent Red 127	Solvent Blue 70
50A-11 Hologram silver *)	---	
51A-11 Hologram gold	Solvent Yellow 21	Solvent Red 122
52A-11 Hologram red	Solvent Red 122	Solvent Red 127
54A-11 Hologram blue	Solvent Red 127	Solvent Blue 70
55A-11 Hologram aqua	Solvent Yellow 21	Solvent Blue 70
56A-11 Hologram purple	Solvent Red 127	Solvent Blue 70
57A-11 Hologram fuchsia	Solvent Red 122	Solvent Red 127
58A-11 Hologram black	Solvent Yellow 21	Solvent Black 27
59A-11 Hologram copper	Solvent Yellow 21	Solvent Red 127 Solvent Red 122
61A-11 Hologram light green	Solvent Yellow 21	Solvent Blue 70
62A-11 Hologram light blue	Solvent Red 127	Solvent Blue 70
96A-11 Hologram sky blue	Solvent Red 127	Solvent Blue 70
108A-11 Hologram navy blue	Solvent Red 127	Solvent Blue 70

*) without any Solvents (Polyethelene Terephthalaet 94,3 %, Aluminium 0,4 %, Epoxy 5,3 %)

Technical data:

Specific weight: 1,38 kg/dm³
Bulk density: between 0,25 and 0,60 kg/dm³ - depending on particle size

Resistance:

Medium	Condition	Result
Temperature (up to 230 °C)	1 min.	resistant
Temperature (up to 175 °C)	5 min.	resistant
MEK (Methyl Ethyl Ketone; 99%)	15 min	Not resistant
Isopropanol (25%)	15 min.	partially resistant
Isopropanol (70%)	15 min.	partially resistant
Demineralized H ₂ O	24 hours	resistant
Demineralized H ₂ O	3 months	partially resistant

Storage indication: Store in a dry manner in closed (original) container by room temperature.

Disposal information: There is no type of waste that occurs due to the product that requires special supervision according to (EU) No. 1357/2014 guideline.

Further information: Sample card Polyester Glitter Grade II
Safety Data Sheet SiLiglit Grade II Holo-11

*Product trials and stability tests are always recommended and are the responsibility of the customer prior to production.
All data are reference values – subject to change without prior notice.*